



TD-(650-670)MDG-132HC

MODULE SIZE

2384*1303*35mm

POWER OUTPUT RANGE

650W - 670W

POSITIVE POWER TOLERANCE

0 - + 3%

MONOCRYSTALLINE MODULE



132 CELL

MAXIMUM EFFICIENCY

21.6%

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty
30 Year Linear Power Warranty

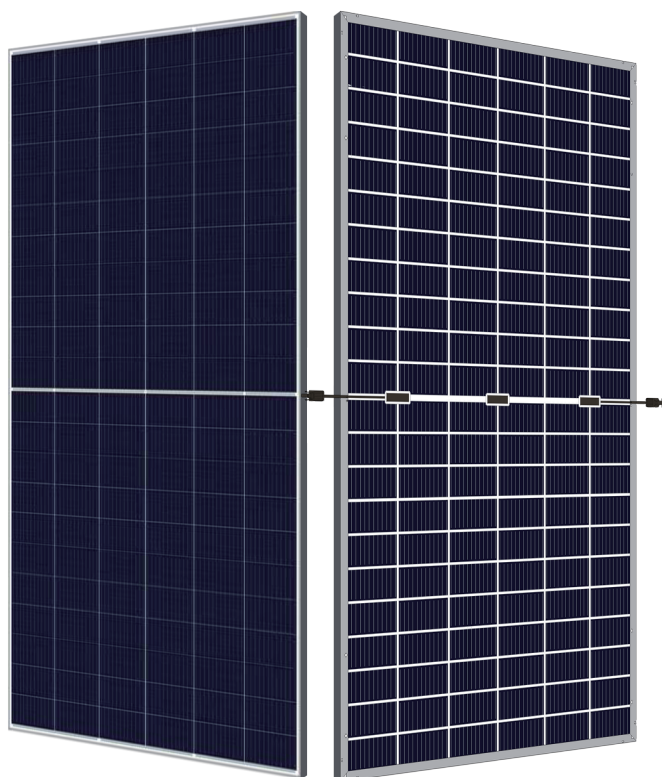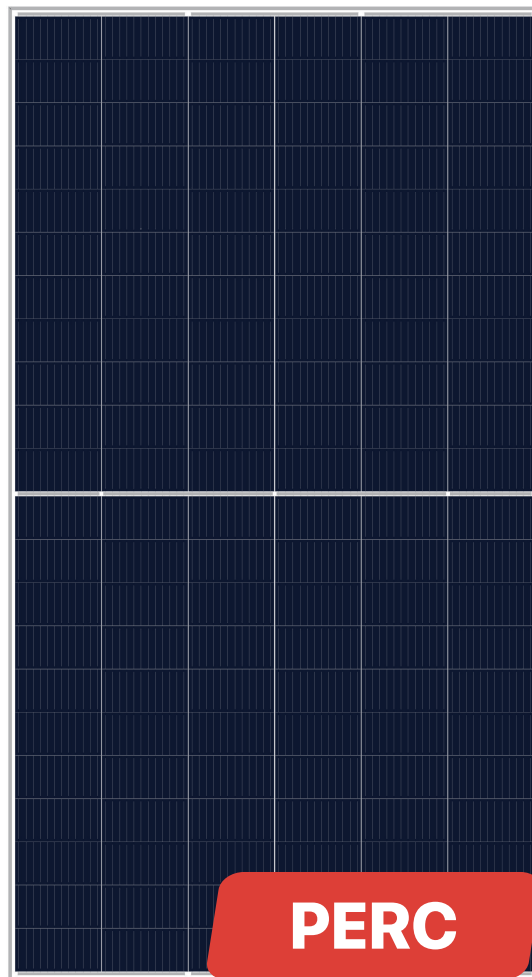

Competitive Low Light
Performance



Reduced Power Loss by
Minimising the Effect of
Shadow Shading



High Density
Encapsulation



Multi-Busbar
Technology



2400pa Wind Load
5400pa Snow Load



LCOE
BOS Reduced BOS &
Increased ROI

TIDE SOLAR


www.tide-solar.com

Add: Wind and Solar Industrial Park, Huishan, Wuxi, Jiangsu, China

Tel: +86-510-83885850

E-mail: info@tide-solar.com

DIMENSIONS OF PV MODULE

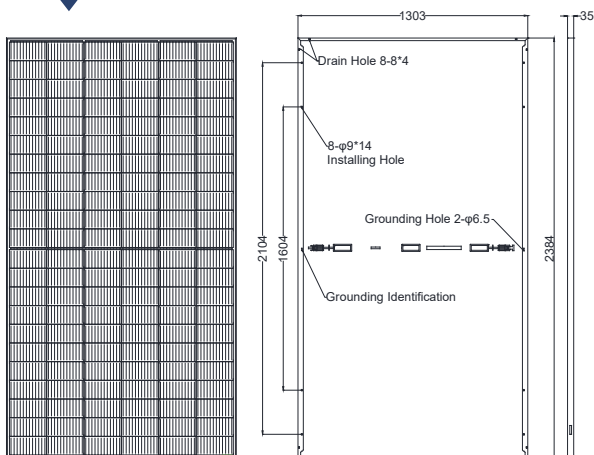

STRUCTURAL CHARACTERISTICS

Module Size	2384x1303x35mm
Weight	37kg
Cell	single crystal PERC 210x105mm(132pieces)
Glass	2.0 mm / 2.0 mm
Frame	anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Lead	4.0mm ² 300mm(+) / 300mm(-) or customized
Mechanical Load	front 5400pa / back 2400pa

ELECTRICAL CHARACTERISTICS

Component Model	TD-650MDG-132HC	TD-655MDG-132HC	TD-660MDG-132HC	TD-665MDG-132HC	TD-670MDG-132HC
Maximum Power (PMP)	STC 650	STC 655	STC 660	STC 665	STC 670
Open Circuit Voltage (VOC)	45.0	45.2	45.4	45.6	45.8
Short Circuit Current (ISC)	18.39	18.43	18.47	18.51	18.55
Maximum Power Voltage (VMP)	37.6	37.8	38.0	38.2	38.4
Maximum Power Current (IMP)	17.29	17.33	17.37	17.41	17.45
Component Efficiency (η)	20.9	21.1	21.3	21.4	21.6
Power Tolerance	(0, +3%)				
Maximum System Voltage	1500V DC				
Maximum Rated Fuse Current	30A				

STC: Irradiance 1000 W/m² module temperature 25 °C AM=1.5

TEMPERATURE CHARACTERISTICS

Maximum Power Temperature Coefficient	-0.35 % / °C
Temperature Coefficient Of Open Circuit Voltage	-0.27 % / °C
Temperature Coefficient Of Short Circuit Current	+0.05 % / °C
Working Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
Bifacial-Factor	70% ± 10%

PACKING METHOD

Module Size	2384x1303x35mm
Container	40' HQ
Quantity Per Pallet	31
Number Of Pallets Per Container	18
Quantity Per Container	558

I-V Curve

